
## **Ordering types**

### **Breaker types**

| ABN type (14kA/460V) |                |           |           |  |
|----------------------|----------------|-----------|-----------|--|
| Rated current, In    | 2-pole 3-pole  |           | 4-pole    |  |
| 15 A                 | ABN62c/15      | ABN63c/15 | ABN64c/15 |  |
| 20 A                 | ABN62c/20      | ABN63c/20 | ABN64c/20 |  |
| 30 A                 | ABN62c/30      | ABN63c/30 | ABN64c/30 |  |
| 40 A                 | ABN62c/40      | ABN63c/40 | ABN64c/40 |  |
| 50 A                 | ABN62c/50      | ABN63c/50 | ABN64c/50 |  |
| 60 A                 | 60 A ABN62c/60 |           | ABN64c/60 |  |

| ABS type (18kA/460V) |           |               |           |  |
|----------------------|-----------|---------------|-----------|--|
| Rated current, In    | 2-pole    | 2-pole 3-pole |           |  |
| 15 A                 | ABS62c/15 | ABS63c/15     | ABS64c/15 |  |
| 20 A                 | ABS62c/20 | ABS63c/20     | ABS64c/20 |  |
| 30 A                 | ABS62c/30 | ABS63c/30     | ABS64c/30 |  |
| 40 A                 | ABS62c/40 | ABS63c/40     | ABS64c/40 |  |
| 50 A                 | ABS62c/50 | ABS63c/50     | ABS64c/50 |  |
| 60 A                 | ABS62c/60 | ABS63c/60     | ABS64c/60 |  |

### Accessories



#### **Electrical auxiliaries**


| AX    | Auxiliary Switch   | -<br> |
|-------|--------------------|-------|
| AL    | Alarm Switch       |       |
| AX+AL | Combination switch | -     |
| SHT   | Shunt Trip         | -     |
| UVT   | Undervoltage trip  | -     |
|       |                    | -     |

| 6 | _ | 9 |
|---|---|---|
| R | ₿ | т |
| م | - | ٩ |
| ြ | စ | 0 |

#### Maximum possibilities

| T-position        | One of above auxiliaries    |  |
|-------------------|-----------------------------|--|
| <b>R-position</b> | Option of AX or AL or AX+AL |  |
|                   |                             |  |

Note) For more detail see 60 page

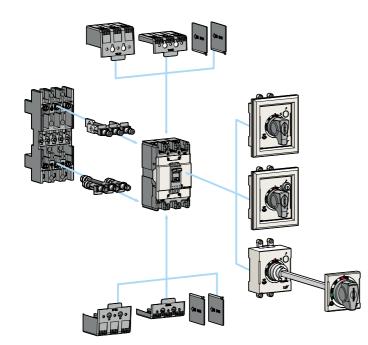



#### **External accessories**

| ABS60c<br>ABN60c | Name                             |  |  |
|------------------|----------------------------------|--|--|
| IB13             | Insulation barrier               |  |  |
| TCL13            | Terminal cover (Long)            |  |  |
| TCS13            | Terminal cover (Short)           |  |  |
| DH100            | Rotary handle (Direct)           |  |  |
| DHK100           | Rotary handle (Direct, Key lock) |  |  |
| EH100            | Rotary handle (Extended)         |  |  |
| RTB1             | Rear terminal (Bar)              |  |  |
| RTR1             | Rear terminal (Round)            |  |  |
| PB-A3            | Plug-in kit                      |  |  |
| PHL100           | Pad handle lock                  |  |  |

Note) For more detail see 65 page

# 100AF MCCB ABN100c



ABN102c



ABN103c



ABN104c

### For more information

| Drawings                        | 76 page |
|---------------------------------|---------|
| <ul> <li>Trip curves</li> </ul> | 72 page |
| <ul> <li>Accessories</li> </ul> | 60 page |
| Connection and mounting         | 89 page |
|                                 |         |

# Ratings

| Frame size                 | size   |              |                           | 100AF            |     |  |
|----------------------------|--------|--------------|---------------------------|------------------|-----|--|
| Type and Pole              |        | N-Туре       |                           |                  |     |  |
| 2-pole<br>3-pole<br>4-pole |        | е            | ABN102c                   |                  |     |  |
|                            |        | ABN103c      |                           |                  |     |  |
|                            |        |              | ABN104c                   |                  |     |  |
| Rated current, In          |        |              | 15-20-30-40-50-60-75-100A |                  |     |  |
| Rated operational vo       | ltage, | Ue           | AC: 690V                  |                  |     |  |
|                            |        |              | DC: 500V                  |                  |     |  |
| Rated insulation volta     | age, U | i            |                           | AC: 750V         |     |  |
| Rated impulse withst       | and vo | oltage, Uimp |                           | 8kV              |     |  |
| Rated short-circuit        | break  | ing          |                           | N-Type           |     |  |
| capacity, Icu              | AC     | 690V         |                           | 5kA              |     |  |
|                            |        | 480/500V     |                           | 10kA             |     |  |
| IEC 60947-2 (lcu)          |        | 460V         |                           | 18kA             |     |  |
| lcs=100%lcu                |        | 415V         |                           | 18kA             |     |  |
|                            |        | 380V         |                           | 22kA             |     |  |
|                            |        | 220/250V     | 35kA                      |                  |     |  |
|                            | DC     | 500V(3P)     | 10kA                      |                  |     |  |
|                            |        | 250V(2P)     | 10kA                      |                  |     |  |
| Protective function        |        |              | Overload, Short-circuit   |                  |     |  |
| Type of trip unit          |        |              |                           | Thermal-Magnetic |     |  |
| Magnetic trip range        |        |              | 400A                      |                  |     |  |
| Endurance                  | Mech   | nanical      | 25000 operations          |                  |     |  |
|                            | Elect  | rical        |                           | 10000 operations |     |  |
| Connection                 | Stan   | dard         |                           | Front connection |     |  |
|                            | Optic  | onal         | Rear connection           |                  |     |  |
|                            |        |              | Plug-in                   |                  |     |  |
| Mounting                   | Stan   | dard         | Screw fixing              |                  |     |  |
| Dimensions (mm)            |        | Pole         | 2р                        | Зр               | 4р  |  |
| d<br>c2                    | 1      | а            | 50                        | 75               | 100 |  |
|                            |        | b            | 130                       | 130              | 130 |  |
|                            |        | c1 Note)     | 60                        | 60               | 60  |  |
|                            |        | c2 Note)     | 64                        | 64               | 64  |  |
|                            |        | d            | 82                        | 82               | 82  |  |
| Weight, kg                 |        | Standard     | 0.5                       | 0.7              | 0.9 |  |
| Certification              |        | Pole         | 2р                        | Зр               | 4р  |  |
| CE marking                 |        | (€           | 0                         | 0                | 0   |  |

Note) Depth by door cut size : c1 for large cut, c2 for small cut