



LED Spotlight Track Utility

Features

- High quality and economical LED chips with exquisite optical lens
- Aluminum housing ensure better thermal control
- Flexible adjustment horizontally and vertically

Benefits

- Uniform light beam with clean beam angle
- Efficient LED chips work with comfortable light
- Flexible to highlight the displayed goods from various angle

Application



Home



Hotel



Restaurant



Retail

Specification

Item Code	Item Description	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	Input Current (mA)	CRI (Ra)	CCT	Lifetime (L70B50)	MOQ (pcs)
140058511	LEDspotSM-U 5W-3000-30D-WH-GP	5	0.50	250	50	45	≥80	3000	20Khrs	500
140058512	LEDspotSM-U 5W-6500-30D-WH-GP	5	0.50	250	50	45	≥80	6500	20Khrs	500
140058513	LEDspotSM-U 7W-3000-30D-WH-GP	7	0.50	350	50	63	≥80	3000	20Khrs	500
140058514	LEDspotSM-U 7W-6500-30D-WH-GP	7	0.50	350	50	63	≥80	6500	20Khrs	500
140058507	LEDspotTR-U 5W-3000-30D-WH-GP	5	0.50	250	50	45	≥80	3000	20Khrs	500
140058508	LEDspotTR-U 5W-6500-30D-WH-GP	5	0.50	250	50	45	≥80	6500	20Khrs	500
140058509	LEDspotTR-U 7W-3000-30D-WH-GP	7	0.50	350	50	63	≥80	3000	20Khrs	500
140058510	LEDspotTR-U 7W-6500-30D-WH-GP	7	0.50	350	50	63	≥80	6500	20Khrs	500
140060534	LEDspotTR-U 5W-3000-30D-BK-GP	5	0.50	250	50	45	≥80	3000	20Khrs	500
140060535	LEDspotTR-U 5W-6500-30D-BK-GP	5	0.50	250	50	45	≥80	6500	20Khrs	500
140060536	LEDspotTR-U 7W-3000-30D-BK-GP	7	0.50	350	50	63	≥80	3000	20Khrs	500
140060537	LEDspotTR-U 7W-6500-30D-BK-GP	7	0.50	350	50	63	≥80	6500	20Khrs	500

Technical Specifications

Colour Consistency (SDCM)	6
Dimmable	No
Housing Colour	White
IP	IP20
IK	IK02
Driver integrated (Yes/No)	No
Glow wire test	650°C
Driver failure rate	1% at 5000h
Weight (pc/kg)	

Electrical Supply


Frequency (Hz)	50 / 60
Voltage (V)	220-240
AC/DC	AC

Mechanical Properties

Housing Material	PC
Optical Material	PMMA

Application Conditions


Operating Temperature	-25-50°C
Application Temperature	25°C
Storage Environment	-25-50°C




Packaging Information

Item		Single Box(1pc/box)		Packaging Unit (8pcs/unit)		
Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/CTN)
140058511	LEDSpotSM-U 5W-3000-30D-WH-GP	125*125*70	0.23	520*440*265	12.58	48
140058512	LEDSpotSM-U 5W-6500-30D-WH-GP	125*125*70	0.23	520*440*265	12.58	48
140058513	LEDSpotSM-U 7W-3000-30D-WH-GP	125*125*70	0.23	520*440*265	12.58	48
140058514	LEDSpotSM-U 7W-6500-30D-WH-GP	125*125*70	0.23	520*440*265	12.58	48
140058507	LEDSpotTR-U 5W-3000-30D-WH-GP	125*125*70	0.23	520*440*265	12.58	48
140058508	LEDSpotTR-U 5W-6500-30D-WH-GP	125*125*70	0.23	520*440*265	12.58	48
140058509	LEDSpotTR-U 7W-3000-30D-WH-GP	125*125*70	0.23	520*440*265	12.58	48
140058510	LEDSpotTR-U 7W-6500-30D-WH-GP	125*125*70	0.23	520*440*265	12.58	48
140060534	LEDSpotTR-U 5W-3000-30D-BK-GP	125*125*70	0.23	520*440*265	12.58	48
140060535	LEDSpotTR-U 5W-6500-30D-BK-GP	125*125*70	0.23	520*440*265	12.58	48
140060536	LEDSpotTR-U 7W-3000-30D-BK-GP	125*125*70	0.23	520*440*265	12.58	48
140060537	LEDSpotTR-U 7W-6500-30D-BK-GP	125*125*70	0.23	520*440*265	12.58	48

Accessory

Item		Packaging Unit			PIC
Item Code	Item Description	Carton Dimension (mm)(LxWxH)	Note	MOQ (pcs)	
140059216	LG205/WH DS	520*195*152	1 sap code contains 1 pc of 2C track, 1 carton contains 30pc	2000	
140059217	LG210/WH DS	1020*195*152	1 sap code contains 1 pc of 2C track, 1 carton contains 30pc	2000	
140059218	LGLJQ-I/WH	348*210*275	1 sap code contains 1 pc of I-shape connector, 1 carton contains 200pc	1000	
140059219	LGLJQ-L/WH	385*320*225	1 sap code contains 1 pc of L-shape connector, 1 carton contains 200pc	1000	
140060538	LG205/BK DS	520*195*152	1 sap code contains 1 pc of 2C track,, 1 carton contains 30pc	2000	
140060539	LG210/BK DS	1020*195*152	1 sap code contains 1 pc of 2C track, 1 carton contains 30pc	2000	
140060540	LGLJQ-I/BK	348*210*275	1 sap code contains 1 pc of I-shape connector, 1 carton contains 200pc	1000	
140060541	LGLJQ-L/BK	385*320*225	1 sap code contains 1 pc of L-shape connector, 1 carton contains 200pc	1000	

Dimensional Drawing

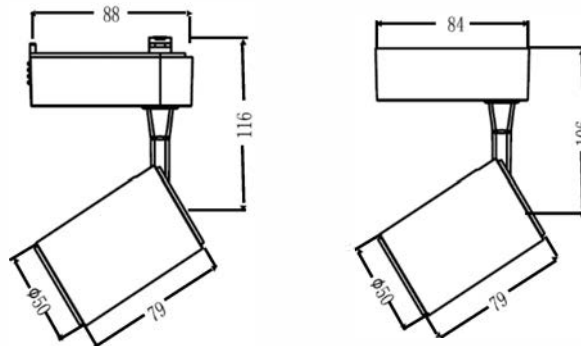

Photometric Data

