


accessories circuit breaker 3WL aux.switch block 2NO +2NC



Model	
product brand name	SENTRON
product designation	Auxiliary contacts for switch position
design of the product	Accessories
General technical data	
degree of pollution	3
Voltage	
surge voltage resistance rated value	4 kV
Supply voltage	
operating voltage	
• at AC at 50 Hz rated value maximum	500 V
• at DC rated value maximum	500 V
Current	
operational current	
• at AC-12 at 110 V rated value	10 A
• at AC-12 at 24 V rated value	10 A
• at AC-12 at 48 V rated value	10 A
• at AC-12 at 400 V rated value	10 A
• at AC-12 at 230 V rated value	10 A
• at AC-15 at 24 V rated value	4 A
• at AC-15 at 48 V rated value	4 A
• at AC-15 at 110 V rated value	4 A
• at AC-15 at 230 V rated value	4 A
• at AC-15 at 400 V rated value	3 A
• at DC-12 at 230 V rated value	1 A
• at DC-13 at 220 V rated value	0.4 A
• at DC-12 at 110 V rated value	3.5 A
• at DC-12 at 48 V rated value	8 A
• at DC-13 at 110 V rated value	1.2 A
• at DC-13 at 48 V rated value	4 A
• at DC-12 at 24 V rated value	10 A
• at DC-13 at 24 V rated value	8 A
General Product Approval	
EMC	Declaration of Conformity
Test Certificates	

[Confirmation](#)

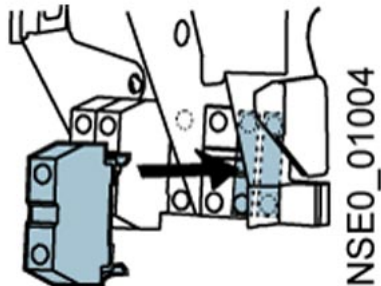

[Miscellaneous](#)

other

[Miscellaneous](#)

[Environmental Con-
firmations](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL9111-0AG01-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL9111-0AG01-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL9111-0AG01-0AA0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>



