

Single relay - REL-IR-BL/L-230AC/4X21



1032531

<https://www.phoenixcontact.com/sg/products/1032531>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Plug-in industrial relay with power contacts, 4 changeover contacts, test button, status LED, mechanical switch position indicator, input voltage: 230 V AC

Single relay - REL-IR-BL/L-230AC/4X21



1032531

<https://www.phoenixcontact.com/sg/products/1032531>

Commercial Data

Order Key	1032531
Packing unit	10 pc
Minimum order quantity	10 pc
Sales Key	*****
Product Key	CK6193
GTIN	4055626537047
Weight per Piece (including packing)	30.02 g
Weight per Piece (excluding packing)	30.02 g
Customs tariff number	85364900
Country of origin	AT

Single relay - REL-IR-BL/L-230AC/4X21



1032531

<https://www.phoenixcontact.com/sg/products/1032531>

Technical Data

Notes

Notes on operation	Do not connect adjacent channels to SELV/ PELV and voltages dangerous to the touch.
Notes on operation	The outputs are not suitable for switching different outer conductors.
Notes on operation	Do not use to separate SELV / PELV circuits from other circuits, because safe isolation is not guaranteed.

Product properties

Operating mode	100% operating factor
Mechanical service life	2×10^7 cycles

Insulation characteristics

Overvoltage category	III
Pollution degree	2
Insulation	Basic insulation

Electrical properties

Service life electrical	see diagram
Maximum power dissipation for nominal condition	1 VA
Test voltage	2.5 kV _{rms} (50 Hz, 1 min., winding/contact)
Test voltage Changeover contact/changeover contact	2 kV _{rms} (50 Hz, 1 min., changeover contact/changeover contact)
Rated insulation voltage	250 V AC
Rated surge voltage	5 kV

Input data

Coil side

Nominal input voltage U_N	230 V AC
Input voltage range	184 V AC ... 379.5 V AC (20 °C)
Mains frequency	50/60 Hz
Typical input current at U_N	4.4 mA (50 Hz)
Typical response time	5 ms ... 15 ms
Typical release time range	5 ms ... 20 ms
Coil voltage	230 V AC
Status display	Yellow LED

Output data

Switching

Contact type	4 changeover contacts
Type of switch contact	Single contact
Drive and function	monostable
Contact material	AgNi

Single relay - REL-IR-BL/L-230AC/4X21



1032531

<https://www.phoenixcontact.com/sg/products/1032531>

Maximum switching voltage	250 V AC/DC
Minimum switching voltage	12 V (10 mA)
Limiting continuous current	6 A
Maximum inrush current	12 A (20 ms, N/O contacts)
Min. switching current	10 mA (12 V)
Interrupting rating (ohmic load) max.	144 W (24 V DC)
	130 W (48 V DC)
	90 W (60 V DC)
	66 W (110 V DC)
	88 W (220 V DC)
	1500 VA (250 V AC)
Switching capacity min.	120 mW

Dimensions

Width	22.5 mm
Height	28 mm
Depth	35.5 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	RT II
	≥ IP54 (Installation location)
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Altitude	≤ 2000 m

Standards and regulations

Air clearances and creepage distances between coil and contact side


Standards/regulations	EN 61810-1
-----------------------	------------

Mounting

Assembly instructions	in rows with zero spacing
Mounting position	any


Drawings

Diagram

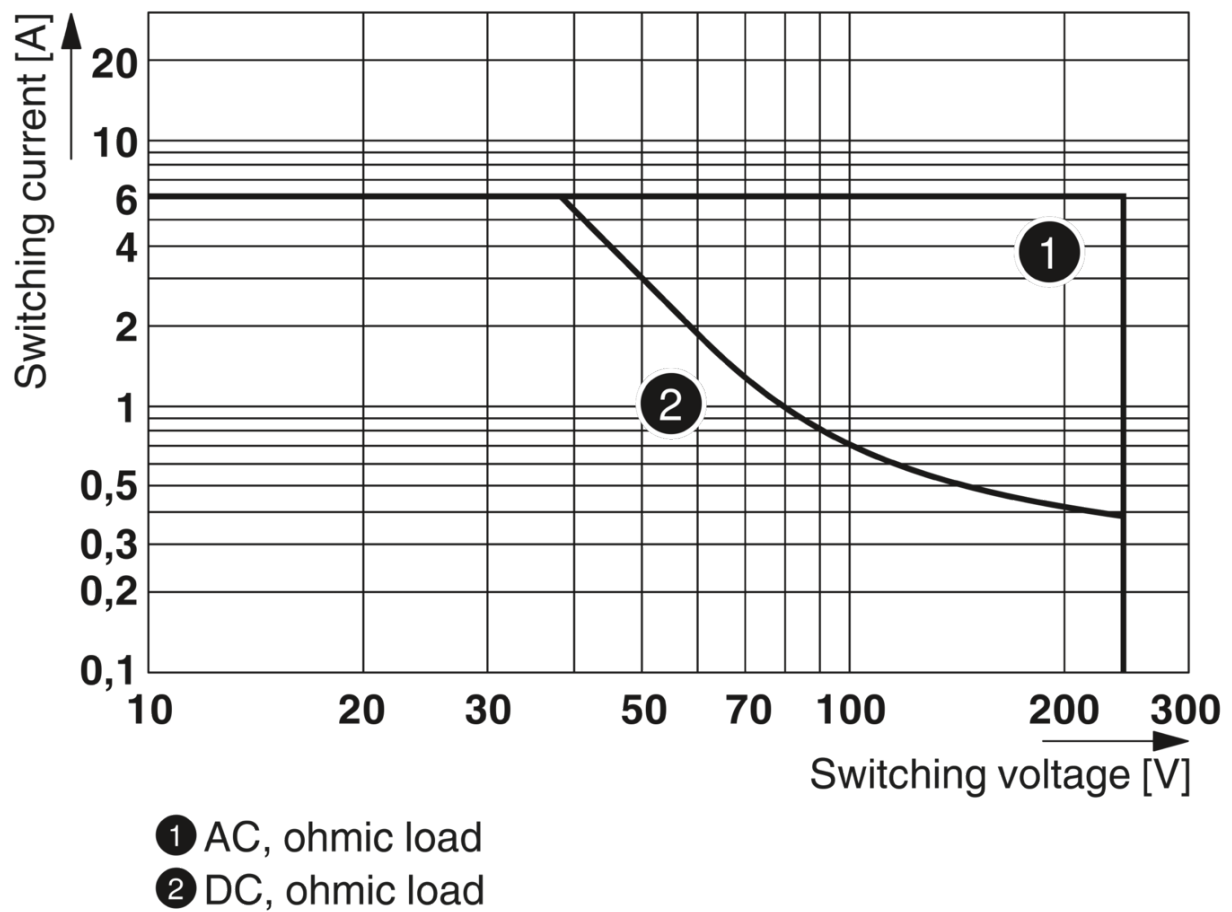

Interrupting rating

Diagram

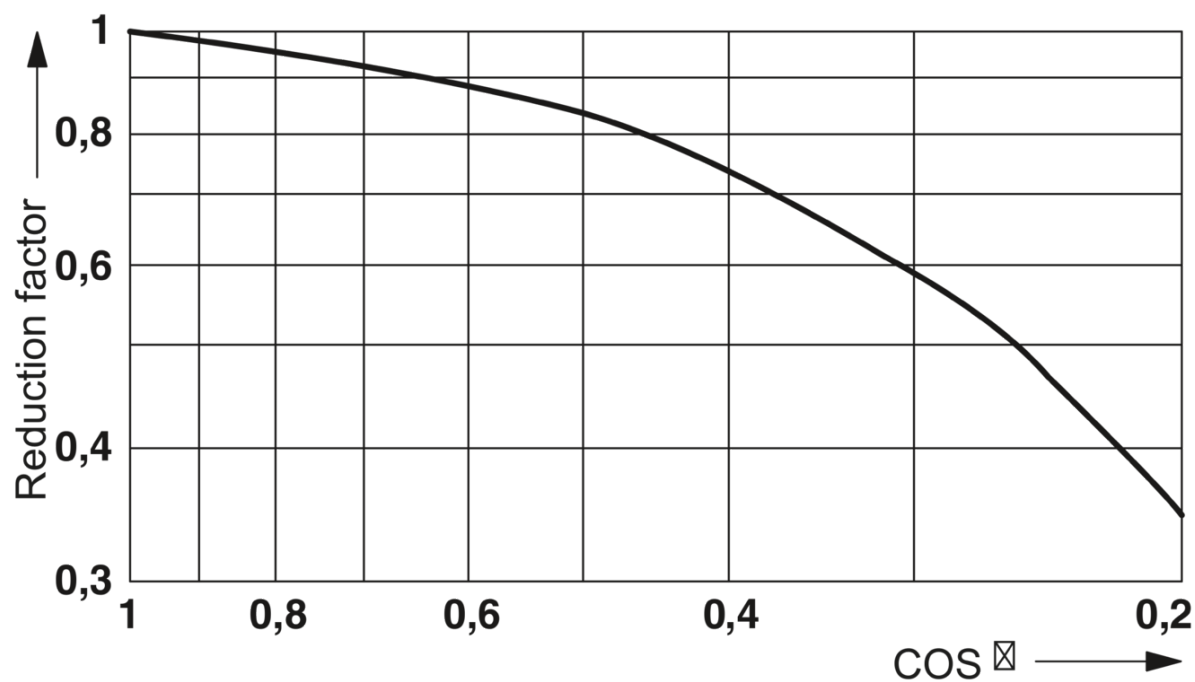

Service life reduction factor


Single relay - REL-IR-BL/L-230AC/4X21

1032531

<https://www.phoenixcontact.com/sg/products/1032531>



Diagram

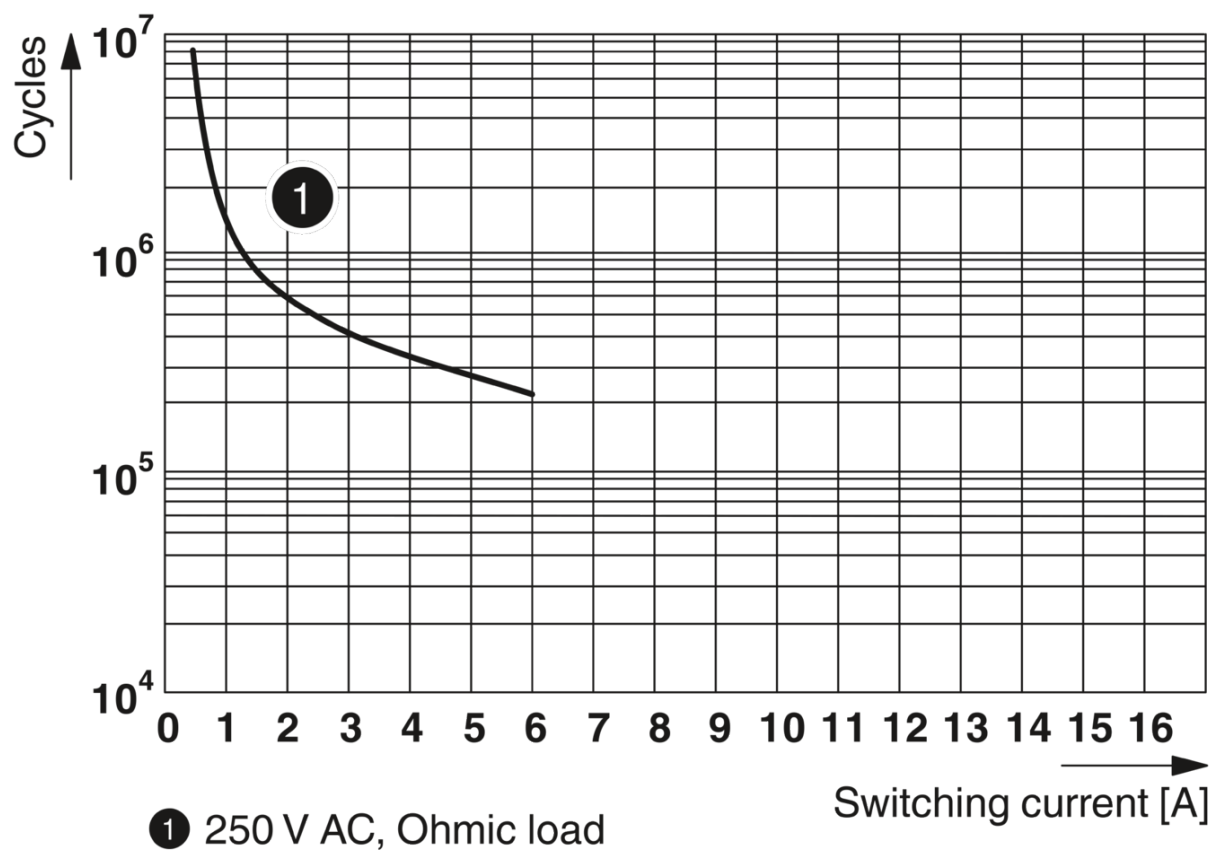

Electrical service life


Single relay - REL-IR-BL/L-230AC/4X21



1032531

<https://www.phoenixcontact.com/sg/products/1032531>

Diagram

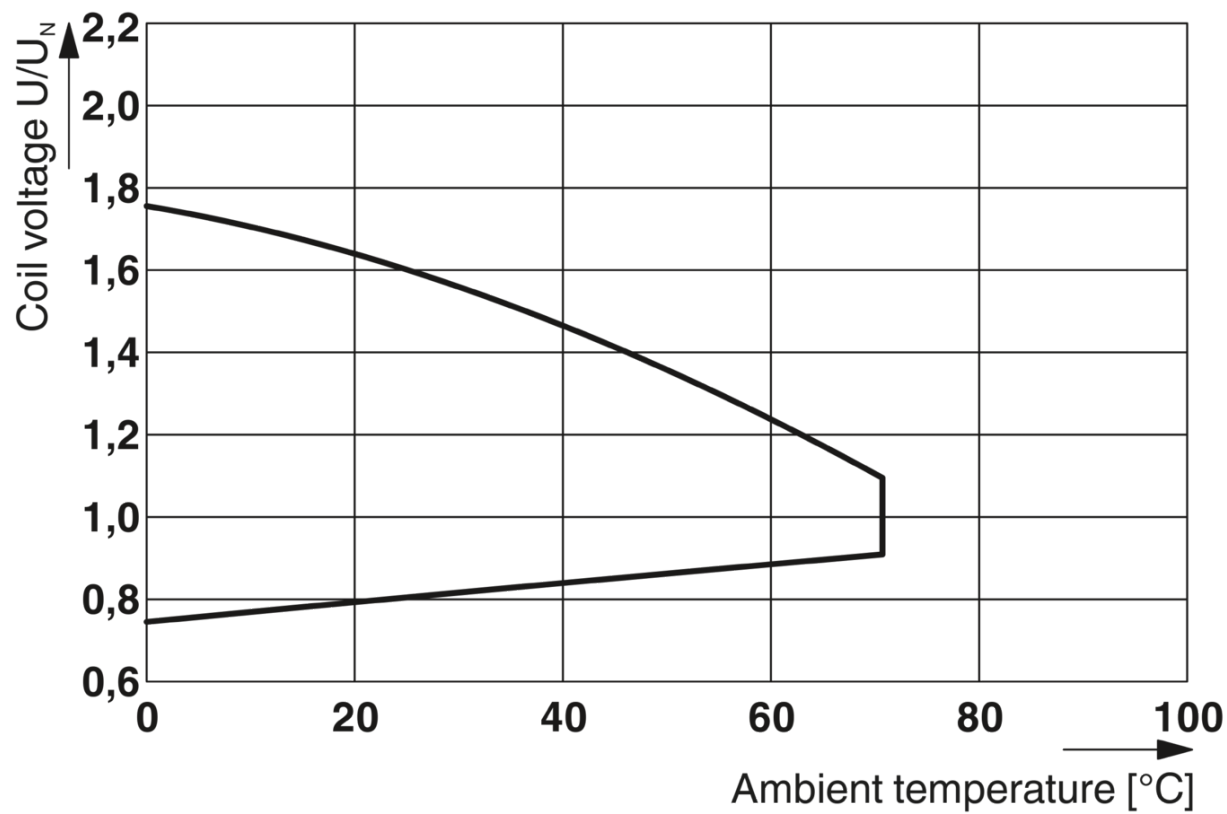

Operating voltage range

Single relay - REL-IR-BL/L-230AC/4X21



1032531

<https://www.phoenixcontact.com/sg/products/1032531>

Approvals

cUL Recognized 

UL Recognized 

EAC 

EAC 

cULus Recognized

Single relay - REL-IR-BL/L-230AC/4X21



1032531

<https://www.phoenixcontact.com/sg/products/1032531>

Classifications

ECLASS

ECLASS-9.0	27371601
ECLASS-10.0.1	27371601
ECLASS-11.0	27371601

ETIM

ETIM 6.0	EC001437
----------	----------

UNSPSC

UNSPSC 19.0	39122334
UNSPSC 20.0	39122334
UNSPSC 21.0	39122334

Single relay - REL-IR-BL/L-230AC/4X21



1032531

<https://www.phoenixcontact.com/sg/products/1032531>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Single relay - REL-IR-BL/L-230AC/4X21

1032531

<https://www.phoenixcontact.com/sg/products/1032531>



Accessories

Relay base

Relay base - ECOR-2-BSC2-RT/4X21 - 2908214

ECOR-2 relay base, for industrial relays with four changeover contacts, bolt connection, for mounting on NS 35/7,5



Relay base

Relay base - ECOR-2-BSC3/4X21 - 2907521

ECOR-2 relay base, for industrial relay with 2 or 4 changeover contacts, screw connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5



Phoenix Contact 2022 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg