



F40T12/D-765 25 PK

Low-pressure mercury discharge lamps with a tubular 37 mm envelope

Product data

General Information			
Cap base	G13 [Medium Bi-Pin Fluorescent]		
Life to 50% failures (nom.)	13000 h		
Light Technical			
Colour Code	54-765		
Lamp Luminous Flux 25°C EL (Nom)	2500 lm		
Colour Designation	Cool Daylight		
Colour Temperature, horizontal (Nom)	6200 K		
Colour Rendering Index,horiz (Nom)	75		
Operating and Electrical			
Power (Rated) (Nom)	39.5 W		
Voltage (Nom)	107 V		
Controls and Dimming			
Dimmable	Yes		

Mechanical and Housing			
Bulb shape	T12 [38 mm (T12)]		
Approval and Application			
Mercury (Hg) content (nom.)	10.5 mg		
Product Data			
Full product code	871869667310200		
Order product name	F40T12/D-765 25 PK		
EAN/UPC – product	8718696673102		
Order code	928006405415		
SAP numerator – quantity per pack	1		
Numerator – packs per outer box	25		
SAP material	928006405415		
SAP net weight (piece)	0.229 kg		


T12 Standard

Dimensional drawing


Product	D (max)	A (max)	B (max)	B (min)	C (max)
F40T12/D-765 25 PK	40.5 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

F40T12/D-765 25 PK

Photometric data

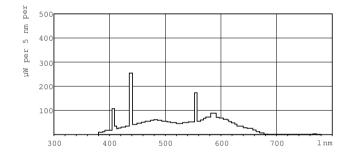

Lightcolour /54-765

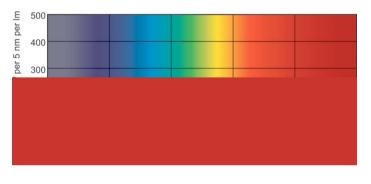

Lightcolour /54-765



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2021, March 1 - data subject to change