

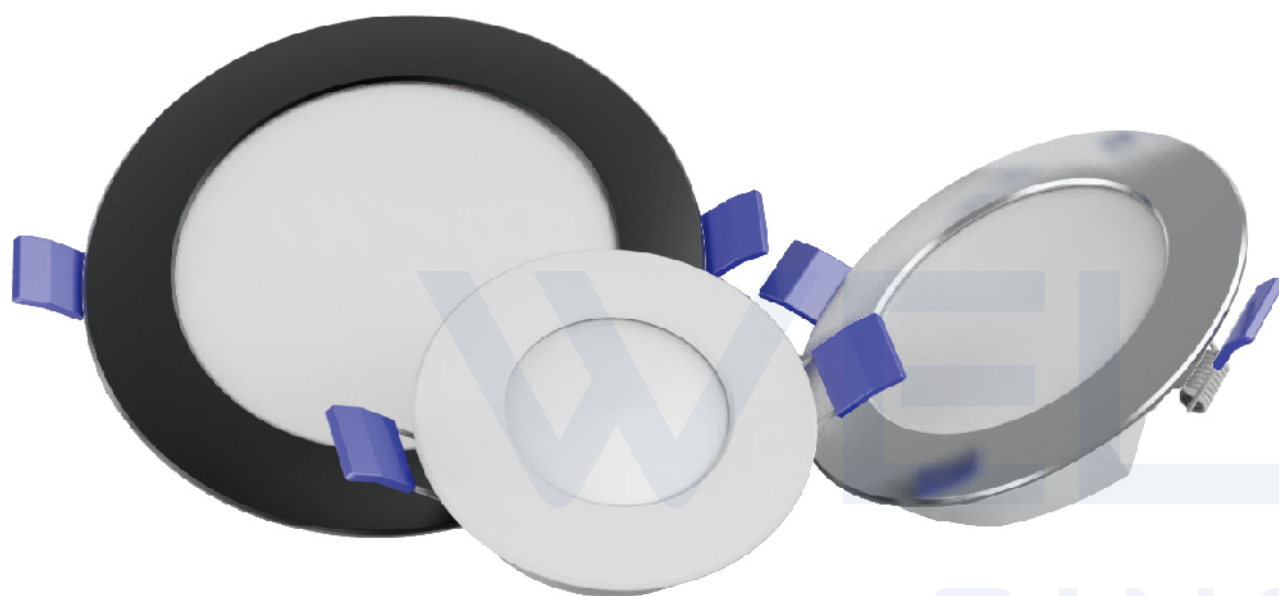


Sunflower Series LED Downlight

- Discover Uniform Brightness
- Adopting Back-lit illumination technology, luminous efficacy $\geq 80\text{lm/W}$
- Including 170° optical lens on each LED to improve light uniformity, creating an eye comfort environment for users
- Built-in driver ensures both a real flatness and a higher safety level, with 15% packing size reduced
- Modularized structure allows an easier SKD solution

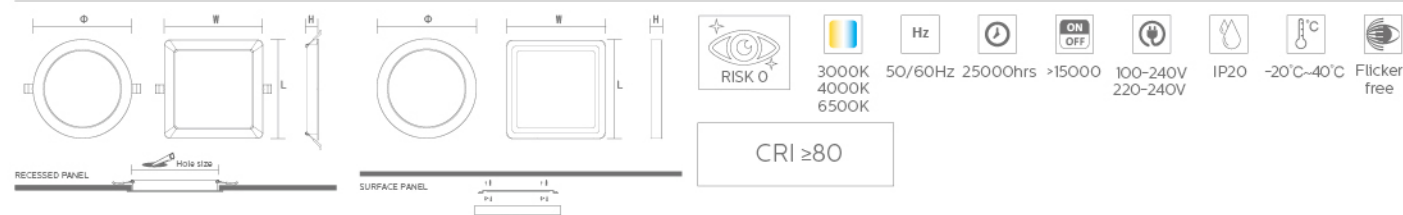

720lm
9W

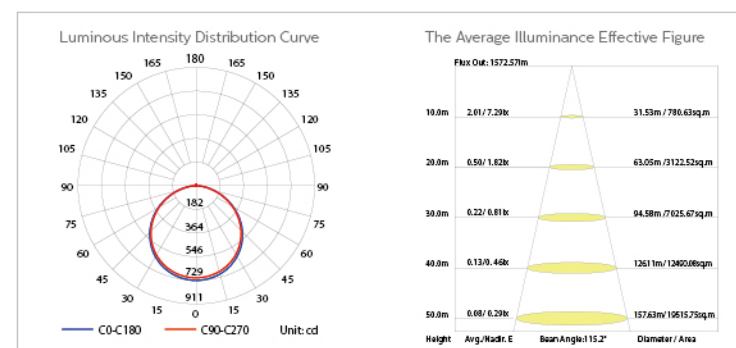

Sunflower Series - Recessed



Watts(W)	P.F.	Luminous Flux(lm)	Hole size(mm)	Dimension(mm)
3W	0.4	240lm	(ϕ)70-80mm	(ϕ)90mmx23mm
6W	0.5	570lm	(ϕ)100-110mm	(ϕ)120mmx23mm
9W	0.5	810lm	(ϕ)125-135mm	(ϕ)150mmx23mm
12W	0.5	960lm	(ϕ)140-160mm	(ϕ)170mmx23mm
18W	0.5	1440lm	(ϕ)195-210mm	(ϕ)225mmx23mm

Surface Color: White/Black/Silver



Watts(W)	P.F.	Luminous Flux(lm)	Hole size(mm)	Dimension(mm)
3W	0.4	240lm	(ϕ)70-80mm	(ϕ)90mmx24mm
6W	0.5	480lm	(ϕ)100-110mm	(ϕ)120mmx24mm
9W	0.5	720lm	(ϕ)125-135mm	(ϕ)150mmx24mm
12W	0.5	960lm	(ϕ)140-160mm	(ϕ)170mmx24mm
18W	0.5	1440lm	(ϕ)195-210mm	(ϕ)225mmx24mm

Surface Color: White



Watts(W)	P.F.	Luminous Flux(lm)	Hole size(mm)	Dimension(mm)
3W	0.4	240lm	75mmx75mm	86mmx86mmx24mm
6W	0.5	480lm	105mmx105mm	120mmx120mmx24mm
9W	0.5	720lm	135mmx135mm	150mmx150mmx24mm
12W	0.5	960lm	155mmx155mm	170mmx170mmx24mm
18W	0.5	1440lm	208mmx208mm	225mmx225mmx24mm

Surface Color: White/Black/Silver

Sunflower Series - Surface



Watts(W)	P.F.	Luminous Flux(lm)	Dimension(mm)
6W	0.5	480lm	(ϕ)120mmx30mm
12W	0.5	960lm	(ϕ)170mmx30mm
18W	0.5	1140lm	(ϕ)225mmx23mm

Surface Color: White/Black/Silver



Watts(W)	P.F.	Luminous Flux(lm)	Dimension(mm)
6W	0.5	480lm	(ϕ)120mmx30mm
12W	0.5	960lm	(ϕ)170mmx30mm
18W	0.5	1140lm	(ϕ)225mmx23mm

Surface Color: White



Watts(W)	P.F.	Luminous Flux(lm)	Dimension(mm)
6W	0.5	480lm	120mmx120mmx28mm
12W	0.5	960lm	170mmx170mmx28mm
18W	0.5	1140lm	225mmx225mmx28mm

Surface Color: White/Black/Silver

SUPER BRIGHT

Sunflower Series - Recessed



Item Number
UDR/SFC/0/1/0/RD

Watts(W)	P.F.	Luminous Flux(lm)	Hole size(mm)	Dimension(mm)
6W	0.5	480lm	(Φ)70-80mm	(Φ)90mmx23mm
9W	0.5	810lm	(Φ)100-110mm	(Φ)120mmx23mm
15W	0.5	1125 lm	(Φ)125-135mm	(Φ)150mmx23mm
20W	0.5	1600lm	(Φ)140-160mm	(Φ)170mmx23mm
24W	0.5	1920lm	(Φ)195-210mm	(Φ)225mmx23mm
30W	0.5/0.9	2400lm	(Φ)195-210mm	(Φ)225mmx23mm

Surface Color: White/Black/Silver



Item Number
UDR/SFD/0/1/0/RD

Watts(W)	P.F.	Luminous Flux(lm)	Hole size(mm)	Dimension(mm)
6W	0.5	480lm	(Φ)70-80mm	(Φ)90mmx24mm
9W	0.5	720lm	(Φ)100-110mm	(Φ)120mmx24mm
15W	0.5	1120lm	(Φ)125-135mm	(Φ)150mmx24mm
20W	0.5	1600lm	(Φ)140-160mm	(Φ)170mmx24mm
24W	0.5	1920lm	(Φ)190-210mm	(Φ)225mmx24mm
30W	0.5/0.9	2400lm	(Φ)190-210mm	(Φ)225mmx24mm

Surface Color: White



Item Number
UDR/SFD/0/1/0/SQ

Watts(W)	P.F.	Luminous Flux(lm)	Hole size(mm)	Dimension(mm)
6W	0.5	480lm	75mmx75mm	86mmx86mmx24mm
9W	0.5	720lm	105mmx105mm	120mmx120mmx24mm
15W	0.5	1200lm	135mmx135mm	150mmx150mmx24mm
20W	0.5	1600lm	155mmx155mm	170mmx170mmx24mm
24W	0.5	1920lm	208mmx208mm	225mmx225mmx24mm
30W	0.5	2400lm	208mmx208mm	225mmx225mmx24mm
30W	0.5	2400lm	208mmx208mm	225mmx225mmx24mm

Surface Color: White/Black/Silver

Sunflower Series - Surface



Item Number
UDS/SFC/0/1/0/RD

Watts(W)	P.F.	Luminous Flux(lm)	Dimension(mm)
9W	0.5/0.9	810lm	(Φ)120mmx30mm
20W	0.5/0.9	1600lm	(Φ)170mmx30mm
24W	0.5/0.9	1920lm	(Φ)225mmx30mm
30W	0.9	2400lm	(Φ)225mmx30mm

Surface Color: White/Black/Silver



Item Number
UDS/SFD/0/1/0/RD

Watts(W)	P.F.	Luminous Flux(lm)	Dimension(mm)
9W	0.5	720lm	(Φ)120mmx28mm
20W	0.5	1600lm	(Φ)170mmx28mm
24W	0.5	1920lm	(Φ)225mmx30mm
30W	0.5/0.9	2400m	(Φ)225mmx30mm

Surface Color: White



Item Number
UDS/SFD/0/1/0/SQ

Watts(W)	P.F.	Luminous Flux(lm)	Dimension(mm)
9W	0.5	720lm	120mmx120mmx28mm
20W	0.5	1600lm	170mmx170mmx28mm
24W	0.5	1920lm	225mmx225mmx28mm
30W	0.9	2400lm	225mmx225mmx28mm

Surface Color: White/Black/Silver

Uniform light distribution

Sunflower downlights are ideal for home, retail spaces and offices

The uniformity of Sunflower downlight can make the whole space brighter while ensures eye comfort