


Ballet Series LED Downlight

- Elegant shape enlightened by Ballet® unique patent design, providing a distinguished image to the market
- Solid structure acquired from high quality material, ensuring higher safety level
- Flat panel available in different size and suitable for wide-ranging replaceability to halogen and CFL downlight/panels in different residential and commercial location



SINCE 1987

1200lm
15W

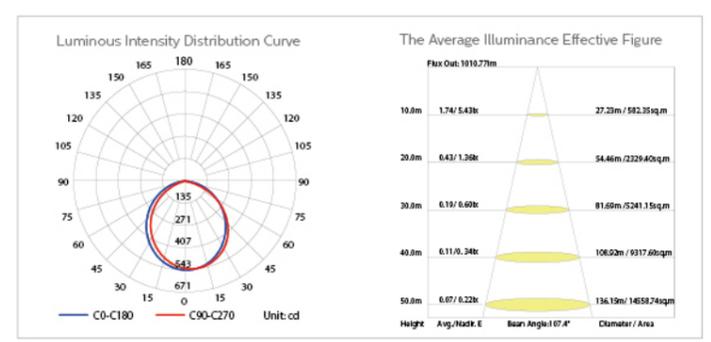

3-STEPS DIMMING

WARM WHITE
NEUTRAL WHITE
COOL WHITE

RISK 0

CRI >80

3000K
4000K
6500K

100-240V
220-240V

50/60Hz

25000hrs

>12500

IP40

-20°C~40°C

Flicker free

ON/OFF

IEC

TECCE

CE LVD

ROHS COMPLIANT

ErP

EMC

Updated to EN/IEC 61000-3-2:2019

Item Number	Watts(W)	P.F.	CCT	Luminous Flux(lm)	Hole size(mm)	Dimension(mm)
UDR/BL/DIM/1/3C/RD	7W	0.5	6500K-3000K-4000K	560lm	(Φ)80mm	(Φ)100mmx44mm
UDR/BL/DIM/1/3C/RD	10W	0.5	6500K-3000K-4000K	800lm	(Φ)92mm	(Φ)116mmx52mm
UDR/BL/DIM/1/3C/RD	15W	0.5	6500K-3000K-4000K	1200lm	(Φ)105mm	(Φ)138mmx54mm
UDR/BL/DIM/1/3C/RD	20W	0.5	6500K-3000K-4000K	1600lm	(Φ)142mm	(Φ)175mmx54mm
UDR/BL/DIM/1/3C/RD	30W	0.9	6500K-3000K-4000K	2400lm	(Φ)180mm	(Φ)225mmx54mm