




# Classic Series Spotlight

- Solid structure design and high quality material acquired, providing higher safety level
- Whole range replaceability to traditional ceiling light, available in different size and power

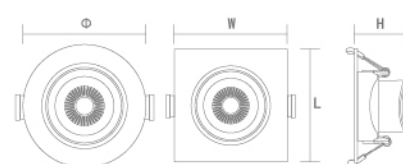

**780lm**  
**12W**

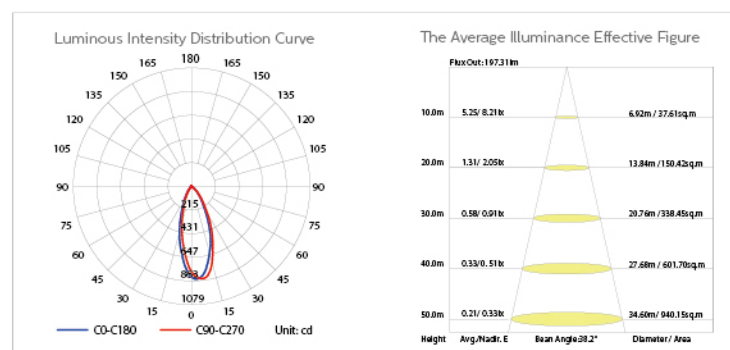

RISK 0  
 3000K, 4000K, 6500K  
 50/60Hz  
 25000hrs  
 15000  
 100-240V, 220-240V  
 IP20  
 -20°C~40°C  
 Flicker free

**CRI ≥80**



Item Number	Watts(W)	P.F.	Luminous Flux(lm)	Hole size(mm)	Dimension(mm)
USR/SNB/0/1/0/RD	3W	0.4	210lm	(Φ)55mm-60mm	(Φ)74mmx44mm
USR/SNB/0/1/0/RD	5W	0.4	350lm	(Φ)75mm-80mm	(Φ)95mmx47mm
USR/SNB/0/1/0/RD	7W	0.4	480lm	(Φ)75mm-80mm	(Φ)95mmx47mm
USR/SNB/0/1/0/RD	7W	0.4	520lm	(Φ)100mm	(Φ)115mmx52mm
USR/SNB/0/1/0/RD	9W	0.4	630lm	(Φ)100mm	(Φ)115mmx52mm
USR/SNB/0/1/0/RD	12W	0.4	960lm	(Φ)125mm	(Φ)140mmx56mm



Item Number	Watts(W)	P.F.	Luminous Flux(lm)	Hole size(mm)	Dimension(mm)
USR/SNA/0/1/0/RD	3W	0.4	210lm	(Φ)55mm-60mm	75mmx75mmx44mm
USR/SNA/0/1/0/RD	5W	0.4	350lm	(Φ)75mm-80mm	95mmx95mmx47mm
USR/SNA/0/1/0/RD	7W	0.4	520lm	(Φ)75mm-80mm	95mmx95mmx47mm
USR/SNA/0/1/0/RD	7W	0.4	520lm	(Φ)100mm	115mmx115mmx52mm
USR/SNA/0/1/0/RD	9W	0.4	630lm	(Φ)100mm	115mmx115mmx52mm
USR/SNA/0/1/0/RD	12W	0.4	960lm	(Φ)125mm	140mmx140mmx56mm



Item Number	Watts(W)	P.F.	Luminous Flux(lm)	Hole size(mm)	Dimension(mm)
USS/SNB/0/1/0/RD	3W	≥0.4	210lm	(Φ)55mm-65mm	(Φ)75mmx27mm
USR/SNB/0/1/0/RD	5W	0.4	350lm	(Φ)71mm-85mm	(Φ)95mmx30mm
USR/SNB/0/1/0/RD	7W	0.4	450lm	(Φ)71mm-85mm	(Φ)95mmx30mm
USR/SNB/0/1/0/RD	9W	0.5	630lm	(Φ)90mm-95mm	(Φ)113mmx35mm
USR/SNB/0/1/0/RD	12W	0.5	960lm	(Φ)115-120mm	(Φ)135mmx36mm



Item Number	Watts(W)	P.F.	Luminous Flux(lm)	Hole size(mm)	Dimension(mm)
USS/SNB/0/1/0/RD	3W	≥0.4	210lm	(Φ)55mm-65mm	75mmx75mmx27mm
USR/SNB/0/1/0/RD	5W	0.4	350lm	(Φ)71mm-85mm	95mmx95mmx30mm
USR/SNB/0/1/0/RD	7W	0.4	450lm	(Φ)71mm-85mm	95mmx95mmx30mm
USR/SNB/0/1/0/RD	9W	0.5	630lm	(Φ)90mm-95mm	113mmx113mmx35mm
USR/SNB/0/1/0/RD	12W	0.5	960lm	(Φ)115mm-120mm	135mmx135mmx36mm