



## HT-AS0605B

### 5" & 6" AIR SANDER (self-vacuum)

Palm grip gives the maximum of comfort and control during your sanding projects. Pad is designed to be used with 6" PSA sanding paper.

- Free Speed: 10000rpm
- Air Consumption: 6cfm(0.150m<sup>3</sup>/min)
- Dia. of Wheel: 6" 150mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 16/18kgs
- Size of Ctn: 47x27x47cm/12pcs



## HT-AS0606A

### 5" & 6" AIR SANDER (self-vacuum)

Palm grip gives the maximum of comfort and control during your sanding projects. Pad is designed to be used with 6" PSA sanding paper.

- Free Speed: 10000rpm
- Air Consumption: 6cfm(0.150m<sup>3</sup>/min)
- Dia. of Wheel: 5" 125mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 16/18kgs
- Size of Ctn: 47x27x47cm/12pcs



## HT-AS0707A

### 5" & 6" AIR SANDER (self-vacuum)

Palm grip gives the maximum of comfort and control during your sanding projects. Pad is designed to be used with 6" PSA sanding paper.

- Free Speed: 10000rpm
- Air Consumption: 6cfm(0.150m<sup>3</sup>/min)
- Dia. of Wheel: 5" 125mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 16/18kgs
- Size of Ctn: 47x27x47cm/12pcs



## HT-AS0605A

### 5" & 6" AIR SANDER

Suitable for all sanding work, removing rust and surface preparation before application of paint.

Self vacuum system equipped. Lightweight and compact design for greater comfort and control.

- Free Speed: 10000rpm
- Air Consumption: 6cfm(0.150m<sup>3</sup>/min)
- Dia. of Wheel: 5" 125mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 16/18kgs
- Size of Ctn: 47x27x47cm/12pcs



## HT-AS0606B

### 5" & 6" AIR SANDER

Palm grip gives the maximum of comfort and control during your sanding projects. Pad is designed to be used with 6" PSA sanding paper.

- Free Speed: 10000rpm
- Air Consumption: 6cfm(0.150m<sup>3</sup>/min)
- Dia. of Wheel: 6" 150mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 16/18kgs
- Size of Ctn: 47x27x47cm/12pcs



## HT-AS0707B

### 5" & 6" AIR SANDER

Palm grip gives the maximum of comfort and control during your sanding projects. Pad is designed to be used with 6" PSA sanding paper.

- Free Speed: 10000rpm
- Air Consumption: 6cfm(0.150m<sup>3</sup>/min)
- Dia. of Wheel: 6" 150mm
- Air Pressure: 6.2bar 90psi

- Air Inlet: 1/4"
- Net Weight: 16/18kgs
- Size of Ctn: 47x27x47cm/12pcs



## HT-AS0606 6" AIR D.A.Q. SANDER

Suitable for all sanding work, removing rust and surface preparation before application of paint. Self vacuum system equipped. Lightweight and compact design for greater comfort and control.


- Free Speed: 10000rpm
- Air Consumption: 4cfm(0.113m<sup>3</sup>/min)
- Dia. of Wheel: 6" 150mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 14/15kgs
- Size of Ctn: 55x26.5x32.5cm/10pcs



## HT-AS0601 6" AIR SANDER

Swirl-free finishes from its dual action pad motion. Built-in regulator for positive speed control. Designed for sanding works of feather edging, metal preparation and blending body filler.

- Free Speed: 10000rpm
- Air Consumption: 4cfm(0.113m<sup>3</sup>/min)
- Dia. of Wheel: 6" 150mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 18/20kgs
- Size of Ctn: 40.5x25x33cm/10pcs



Sticky sanding pad

## HT-AS0603 6" AIR SANDER (self-vacuum)

One-piece speed control lever. Hardened steel alloy cylinder. Perfectly-balanced pad. Low profile. Ergonomic design. Small-grip model for more comfortable grip while sanding. 3/32" Diameter orbit model for super-fine finishes. Tighter random circular and elliptical pattern to provide a higher degree of finish on wood, metal and composites.

- Free Speed: 10000rpm
- Air Consumption: 2.2cfm(0.062m<sup>3</sup>/min)
- Dia. of Wheel: 6" 150mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 9/10kgs
- Size of Ctn: 47x27x47cm/10pcs



## HT-AS0604 5" & 6" AIR SANDER (self-vacuum)

One-piece speed control lever. Hardened steel alloy cylinder. Perfectly-balanced pad. Low profile. Ergonomic design. Small-grip model for more comfortable grip while sanding. 3/32" Diameter orbit model for super-fine finishes. Tighter random circular and elliptical pattern to provide a higher degree of finish on wood, metal and composites.

- Free Speed: 10000RPM
- Air Consumption: 2.2cfm(0.062m<sup>3</sup>/min)
- Dia. of Wheel: 6" 150mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 9/10kgs
- Size of Ctn: 47x27x47cm/12pcs



## HT-AS737B 2" AIR ANGLE SANDER (with velcro backing pad)

Compact, lightweight for easy handling. Ideal for light sanding, removing rust, and smoothing welds.



- Free Speed: 15000rpm
- Air Consumption: 4cfm(0.113m<sup>3</sup>/min)
- Dia. of Wheel: 2" 50mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 12/13kgs
- Size of Ctn: 25x20x37cm/20pcs

## HT-AS737D 2" AIR ANGLE SANDER (with rubber backing pad)

Compact, lightweight for easy handling. Ideal for light sanding, removing rust, and smoothing welds.



- Free Speed: 15000rpm
- Air Consumption: 4cfm(0.113m<sup>3</sup>/min)
- Dia. of Wheel: 2" 50mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 12/13kgs
- Size of Ctn: 31x20x26cm/20pcs

## HT-AS558-1

### 2" & 3" AIR ANGLE SANDER (eccentric)

Compact, lightweight for easy handling.  
Ideal for light sanding, removing rust, and smoothing welds.

- Free Speed: 16000rpm
- Air Consumption: 3cfm(0.084m<sup>3</sup>/min)
- Dia. of Wheel: 2" 50mm, 3" 75mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 14/16kgs
- Size of Ctn: 50x21x49cm/20pcs



## HT-AS558-2

### 2" & 3" AIR ANGLE SANDER (straight core)

Compact, lightweight for easy handling.  
Ideal for light sanding, removing rust, and smoothing welds.

- Free Speed: 16000rpm
- Air Consumption: 3cfm(0.084m<sup>3</sup>/min)
- Dia. of Wheel: 2" 50mm, 3" 75mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 14/16kgs
- Size of Ctn: 50x21x49cm/20pcs



## HT-AS0880A

### 7" AIR ANGLE SANDER

Safety lever throttle.  
Built-in regulator.  
Heavy duty motor handles toughjobs.  
Planetary gearing balances load on bearings and gears for greater power.  
Great for removing rust, sanding metal and roughing body filler.  
Side exhaust.

- Free Speed: 4500rpm
- Air Consumption: 5cfm(0.14m<sup>3</sup>/min)
- Dia. of Wheel: 7" 178mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 22/24kgs
- Size of Ctn: 37.5x36.5x37cm/10pcs



## HT-AS0880B

### 7" AIR ANGLE POLISHER / BUFFER

Safety lever throttle.  
Built-in regulator.  
Heavy duty motor handles toughjobs.  
Planetary gearing balances load on bearings and gears for greater power.  
Great for removing rust, sanding metal and roughing body filler.  
Side exhaust.

- Free Speed: 3000rpm
- Air Consumption: 5cfm(0.14m<sup>3</sup>/min)
- Dia. of Wheel: 7" 178mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 22/24kgs
- Size of Ctn: 37.5x36.5x37cm/10pcs



## HT-AT301

### 7" AIR JITTERBUG SANDER

Shock-absorbing rubber grip.  
Positive locking clamps hold sand paper firmly in place.  
Designed for any sanding job on paint, metal and fiberglass.

- Free Speed: 8000rpm
- Air Consumption: 6cfm(0.17m<sup>3</sup>/min)
- Pad Size: 3-1/2"x6-1/2" 90x187mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 19/21kgs
- Size of Ctn: 53x21x29cm/10pcs



## HT-AS1601

### STRAIGHT LINE AIR SANDER

Dual cylinder, 25mm stroke, 2400rpm for rapid material removal.  
Design for comfortable operation performs on plastic fillers at any stage of hardening.  
Feathers with ease and smoothness.  
Side exhaust.

- Free Speed: 2500RPM
- Air Consumption: 6cfm(0.17m<sup>3</sup>/min)
- Pad Size: 2-1/2"x16" 64x407mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 26/28kgs
- Size of Ctn: 42x38x38cm/10pcs




## HT-AS256

### AIR SHEAR AND NIBBLE



- Free Speed: 18000rpm
- Install disc size: 22mm
- Air Consumption: 6cfm(0.17m<sup>3</sup>/min)
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 20/22kgs
- Size of Ctn: 30x31x37cm/20pcs



## HT-AS0301

### HIGH SPEED AIR SANDER




- Free Speed: 18000RPM
- Air Consumption: 4cfm(0.113m<sup>3</sup>/min)
- Dia. of Wheel: 3" -5" 75-125mm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 1kgs
- Quantity 20ft: 33466pcs

Helps you to do fine sanding jobs like wood-working, furniture-polishing, plastic, aluminum & metal-polishing and even small spot sanding job like trims, curves and other difficult-to-reach spots for common sanding machines.  
Rear exhaust.

## HT-AS2501

### AIR BELT SANDER

- Free Speed: 16000RPM
- Belt Size: 10x330mm
- Air Consumption: 6cfm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 19/20kgs
- Size of Ctn: 38x31x31cm/20pcs

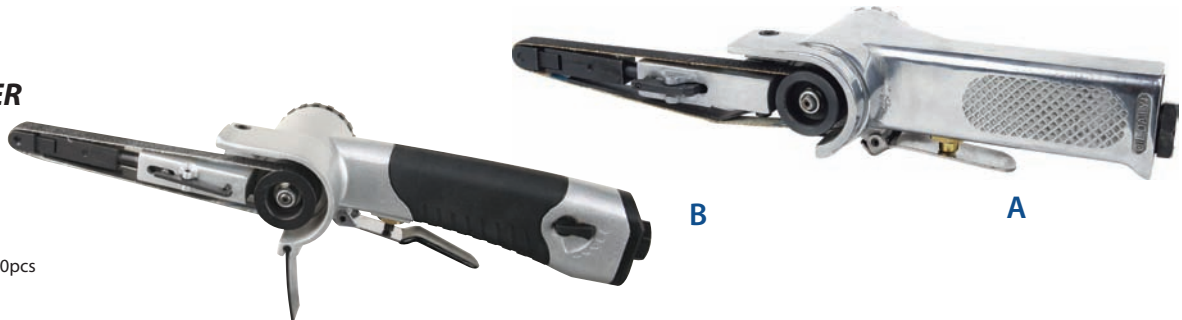

## HT-AS2503

### AIR BELT SANDER

- Free Speed: 16000RPM
- Belt Size: 20x520mm
- Air Consumption: 6cfm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 14/15kgs
- Size of Ctn: 36.5x31x36cm/10pcs



## HT-AS2502

### LENGTHENING AIR BELT SANDER

Helps you to do fine sanding jobs like wood-working, furniture-polishing, plastic, aluminum & metal-polishing and even small spot sanding job like trims, curves and other difficult-to-reach spots for common sanding machines.  
Rear exhaust.



- Free Speed: 16000RPM
- Belt Size: 10x600mm
- Air Consumption: 6cfm
- Air Pressure: 6.2bar 90psi
- Air Inlet: 1/4"
- Net Weight: 24.5/25.5kgs
- Size of Ctn: 48x42x29cm/25pcs

## HT-AS2601

### EIGHT PETAL SANDER

- Shaft Diameter: 10mm
- Free Rotational Speed: 3000rpm
- Air Consumption: 4cfm(0.113m<sup>3</sup>/min)
- Applicable Air Pressure: 6-8kgf/cm<sup>2</sup>
- The Trachea: 6x10mm
- Net Weight: 20/22kgs
- Size of Ctn: 45x26x21cm/20pcs

