


# Product data sheet

Specifications

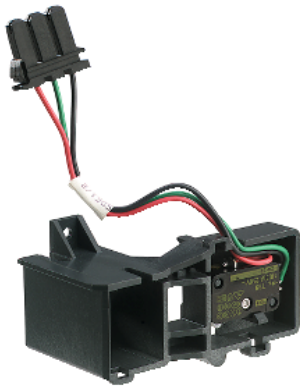

## auxiliary contact - 1 SDE

48475

### Main

Product or component type	Auxiliary contact
Device short name	SDE
Range compatibility	MasterPact NW
Signal contacts composition	1 NO/NC

### Complementary

Auxiliary contacts type	Standard
Mounting mode	Drawout
[Ith] conventional free air thermal current	5 A
[Ie] rated operational current	AC-12: 5 A at 480 V AC 50/60 Hz AC-12: 3 A at 690 V AC 50/60 Hz AC-12: 5 A at 240/380 V AC 50/60 Hz DC-12: 0.15 A at 250 V DC DC-12: 3 A at 24/48 V DC DC-12: 0.3 A at 125 V DC
Minimum load	100 mA at 24 V

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	70.0 g
Package 1 Height	3.5 cm
Package 1 width	4.0 cm
Package 1 Length	7.3 cm

### Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information

**California proposition 65**

WARNING: This product can expose you to chemicals including: DINP, which is known to the State of California to cause cancer, and DIDP, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**Contractual warranty**

---

Warranty 18 months