


accessories circuit breaker 3WL aux.switch block 1NO+1NC



Model			
product brand name	SENTRON		
product designation	Auxiliary contacts for switch position		
design of the product	Accessories		
General technical data			
degree of pollution	3		
Voltage			
surge voltage resistance rated value	4 kV		
Supply voltage			
operating voltage			
<ul style="list-style-type: none"> at AC at 50 Hz rated value maximum at DC rated value maximum 	500 V 500 V		
Current			
operational current			
<ul style="list-style-type: none"> at AC-12 at 110 V rated value at AC-12 at 24 V rated value at AC-12 at 48 V rated value at AC-12 at 400 V rated value at AC-12 at 230 V rated value at AC-15 at 24 V rated value at AC-15 at 48 V rated value at AC-15 at 110 V rated value at AC-15 at 230 V rated value at AC-15 at 400 V rated value at DC-12 at 230 V rated value at DC-13 at 220 V rated value at DC-12 at 110 V rated value at DC-12 at 48 V rated value at DC-13 at 110 V rated value at DC-13 at 48 V rated value at DC-12 at 24 V rated value at DC-13 at 24 V rated value 	10 A 10 A 10 A 10 A 10 A 4 A 4 A 4 A 4 A 3 A 1 A 0.4 A 3.5 A 8 A 1.2 A 4 A 10 A 8 A		
General Product Approval	EMC	Declaration of Conformity	Test Certificates

[Confirmation](#)

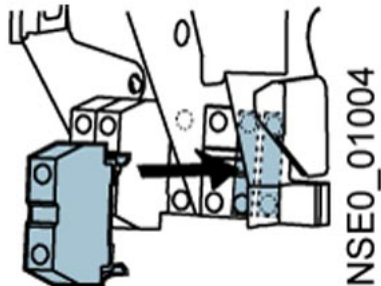

[Miscellaneous](#)

other

[Environmental Con-
firmations](#)

[Miscellaneous](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL9111-0AG03-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL9111-0AG03-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL9111-0AG03-0AA0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>



